

Chimney liners are required by the National Fuel Gas Code for most installations with 80% efficient gas-fired equipment. The chimney liner prevents dangerous gas condensate from deteriorating the chimney, interior walls and ceilings. It also helps prevent indoor air pollution and dangerous carbon monoxide fumes.


Tough, 2-ply aluminum Flexjet chimney liner is the easiest solution to this problem with its drip-free design, flexibility of installation and wide range of lengths and kits.

THE SAFE, VERSATILE SOLUTION TO CHIMNEY LINING



Interior Chimney Application

All Flexjet liner within the chimney

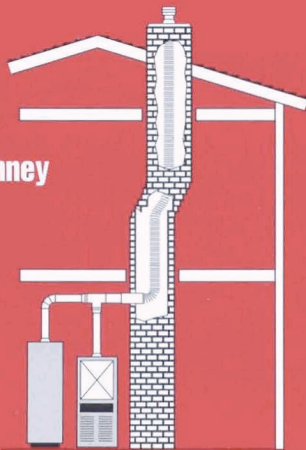

Exterior Chimney Application

Combination "B" vent and Flexjet liner system



(Shown at left)
Standard Kit includes: Liner, Flashing, Jet Cap, Mortar Guard, Storm Collar. Kits available in diameters of 3", 4", 5", 5 1/2", 6", 7", 8" and 10". Continuous 25' & 35' lengths. 10' splicer lengths also available.

Other lengths and diameters also available. 5 1/2" diameter is ideal for standard chimney tiles (6 1/4" x 6 1/4" inside dimensions). Easier to install than standard 6" diameter chimney liner with more capacity than 5" chimney liner.

Also available: (shown at right) Starter Cone, Double-Wall Connector Fitting, Single-Wall Connector/Splicer Fitting. For shipping efficiency, chimney liner is compressed to 1/3 of actual length. Standard 3" through 6" dia. kits shippable via UPS.



3020 Mine Road - Fredericksburg, Virginia 22408
 Phone 866-3AIRJET Facsimile 574-262-2075