



## EXHAUSTO Power Venter RSIF

### Use

The EXHAUSTO RSIF Power Venter is intended for use as an in-line draft inducer. It is specifically designed for applications where reliable and efficient operation, low noise level, low energy consumption, variable speed and compact design are of utmost importance.

Typical uses are: mechanical venting of gas-fired boilers and water heaters. For indoor installation only.

### Description

The EXHAUSTO RSIF Power Venter is an efficient high-temperature ventilator with forward-inclined impeller. The ventilator housing is made of galvanized steel and insulated on all sides with fiberglass mats. The insulation assures a very low noise level and reduces the risk of condensation.

The RSIF is equipped with a direct drive, energy-efficient, totally enclosed, variable speed motor.

A service door on the front provides easy access to the inside of the fan and the duct connections. The motor and impeller are mounted on the door. The door has lockable snap locks.

The duct connections are of the slip connection type with adaptors available for ease of installation.

The Power Venter can be mounted on vibration isolating support legs or from ceiling mounted brackets.

The RSIF model is approved for temperatures up to 400°F (205°C), non-condensing applications.

### Material

The housing is made of galvanized steel and insulated with 1.25" thick fiberglass mats.

### Motor

Commercial grade, totally enclosed, variable speed single-phase motor. Class H insulation class motor with sealed and permanently lubricated ball bearings. Thermal overload protection.

### Listings

ETL listing # E109205550D  
 UL378-Draft Equipment  
 CSA-CAN3-B255-M81-Mechanical Flue  
 Gas Exhausters

CE compliant  
 Manufactured at ISO9001 certified plant


### Warranty

2 year factory warranty

Specifications are subject to change without notice.



RSIF Power Venter






### Accessories

	<p>EBC5 control kit with fan speed control &amp; post purge, used with 24 VAC or 120 VAC appliance control circuit.</p>
	<p>Fan speed control is used to set the speed of the fan to match the load. Available in 5 and 8 Amps.</p>
	<p>Adapters for easy connection of B-Vent or Pressure Stack including silicone seal.</p>
	<p>Vent Hood for side-wall terminations.</p>
	<p>Proven Draft Switch including probe and tubing</p>

## Specifications


Model		RSIF 146	RSIF 160	RSIF 180
Fan Type		Centrifugal Impeller (F-Wheel)		
Motor Type		TEFC		
Voltage	VAC	1x120		
Amperage	Amps	1.2	2.9	5.8
Motor Output	HP	1/10	1/4	1/2
	kW	0.08	0.16	0.35
RPM		1600		
Weight	lbs	28	38	60
	kg	13	17	27
Duct Connection	E	in	6.3	7.9
		mm	160	200
Dimensions	A	in	13.60	14.57
		mm	345	370
B	in	11.62	12.60	
	mm	295	320	
C	in	7.88	9.26	
	mm	200	235	
D	in	4.33	5.52	
	mm	110	140	
G	in	13.78	15.75	
	mm	350	400	
H	in	6.50	7.10	
	mm	165	180	
J	in	7.88	8.27	
	mm	200	210	
K	in	4.33	5.12	
	mm	110	130	
R	in	13.60	14.57	
	mm	345	370	



## Accessories

Accessory	RSIF 146	RSIF 160	RSIF 180
Control Kit	EBC5	EBC5	EBC5
Fan Speed Control	FSC5	FSC5	FSC8
B-Vent Connector Kit	EXH1801	EXH1800	EXH1800
Pressure Stack Connector Kit	EXH1802	EXH1804 + EXH1800	EXH1804 + EXH1800
Vent Hood	EXH0056-6	EXH0056-8	EXH0056-8
Proven Draft Switch	EXH1142	EXH1142	EXH1142

## Capacity

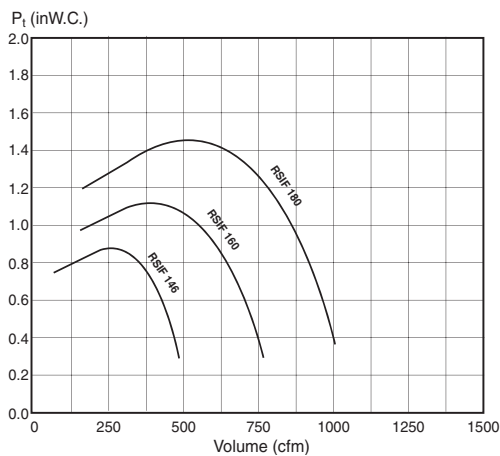

## Sound Diagram

Model	Lw dB							Lp DB (A)
	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	8000Hz	
RSIF 146	48	48	48	41	38	35	32	40
RSIF 160	53	54	51	43	39	36	32	41
RSIF 180	55	60	53	46	41	36	32	47

Tolerance: +/-3 dB

Lw: Sound Power Level. Noise to surroundings.

Lp: Sound Pressure Level. 3 feet (1 m) from the center of the fan.

Note: A sound power level of 30 dB is equivalent to a voice at a very soft whisper. A sound power level of 70 dB is equivalent to a voice at conversational level.